




ACCURATE

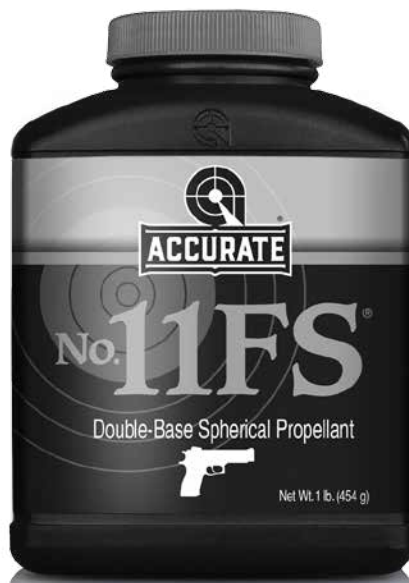

LOAD DATA FOR
ACCURATE NO. 11FS

EDITION 1/2017

WESTERN
— POWDERS —

WWW.WESTERNPOWDERS.COM

LOAD DATA

WARNINGS ■

This Guide is intended to be used as a reference. Each individual handloader must determine what is the best and safest load for their equipment. The loads described in this Guide were generated at the ballistics test facilities of Western Powders, Inc. in accordance with SAAMI (Sporting Arms and Ammunition Manufacturers' Institute) guidelines. All loads are fired through test barrels and individual results fired through different firearms may vary. The handloader is cautioned to read and follow safe reloading practices such as those outlined in the NRA Guide to Reloading before attempting to reload any cartridge.

DISCLAIMER ■

Western Powders, Inc. has developed this Guide to provide the handloader with current data for reloading Accurate and Ramshot powders. This Guide is not intended to be a reloading textbook, but rather a list of recommended loads for Accurate and Ramshot powders. As Western Powders, Inc. has no control over the actual reloading procedures and methods being used, or the condition or choice of firearms and components used, no responsibility for the use of this data is implied or assumed.

The buyer/user assumes full responsibility, risk, and liabilities for all injuries (including death), damages, and/or losses to persons or properties resulting from the use/misuse of these products. The ballistics data contained in this Guide was obtained at Western Powders' ballistics facilities under strictly controlled conditions and is applicable ONLY for Accurate and Ramshot powders. It is important to remember that equipment variations and different reloading techniques, as well as component variations, will most likely yield slightly different ballistics data. With this in mind, it is imperative that you do not exceed the maximum charge recommendations in this Guide and that you always start loading with the minimum powder charges in the loads illustrated.

POWDER WARNINGS ■

Smokeless powder is intended to function by burning. Therefore, it must be protected from exposure to flame, sparks, high temperatures and the sun's rays. When ignited, smokeless powder will normally continue to burn (and generate gas pressure) until the powder is entirely consumed. With this in mind:

1. **NEVER MIX OR SUBSTITUTE powders with other powders;**
2. Avoid open flames, combustible agents, and any spark-producing tools when handling powders;
3. Store powder in its original container in a cool/dry place;
4. Do not keep or use old or salvaged powders;
5. Check powder for deterioration on a regular basis. Deteriorated powder is detected by its noxious odor (not to be confused with solvents such as alcohol or ether).
6. Pour out only the amount of powder needed for the application being conducted;
7. If you accidentally spill powder, use a broom and dust pan to clean it up. **DO NOT VACUUM** the spilled powder;
8. Do not stockpile powder - store and utilize the amount of powder necessary for your current reloading needs;
9. Be certain that the powder container is empty prior to discarding.

NOTE: LOAD DATA IN THIS GUIDE SUPERSEDES ALL PREVIOUS ACCURATE AND RAMSHOT LOAD DATA.
Always use the latest Load Data.

**WESTERN
POWDERS**

WWW.WESTERNPOWDERS.COM

PRIMER WARNINGS ■

1. NEVER MIX PRIMERS of different makes;
2. Store primers in their original packaging in a cool, dry place. Exposure to heat causes primer deterioration;
3. Do not stockpile primers or store in bulk. Storing primers in this manner can lead to mass detonation if a primer ignites;
4. Do not de-cap live or new primers - fire them in the appropriate gun and then de-cap;
5. For best results, use the mildest primer consistent with good ignition;
6. Do not force primers. If there is resistance in seating or feeding primers, stop and investigate the cause of the problem;
7. Clean your hands before and after handling primers - oil contamination can affect the ignitability of the primer.

QUALITY CONTROL ■

Reloading provides an individual with a cost effective means of obtaining ammunition, while at the same time allowing for custom load assemblage. You, the individual handloader, are responsible for producing the ammunition that you will later shoot. The caution and diligence you put into your reloading process can be ultimately rewarding or disastrous depending upon the quality of your work.

1. Common sense and care must be practiced during all phases;
2. Follow load recommendations exactly.
3. ALWAYS START LOADING WITH THE MINIMUM POWDER CHARGE SHOWN;
4. Designate a work area to be used only for reloading and keep that area clean and orderly;
5. Label components and reloads for quick and easy identification;
6. Develop a reloading routine and follow it;
7. Understand what you are doing and why it must be done in a specific manner; Never reload when you are tired or distracted;
8. Wear safety glasses when reloading;
9. DO NOT smoke, eat, or drink in your reloading area or while you are reloading;
10. Keep your powder, reloading equipment and firearms secure from children;
11. Obey all laws and regulations regarding purchasing, quantity, and storage of powder(s).
12. When the case fill is less than 50% extreme care should be taken to avoid the possibility of double charging. Always check every round.

COMPANY ABBREVIATIONS

AK	Alaska Bullet Company	HDY	Hornady Manufacturing Company	RAIN	Rainier Ballistics LLC
ALEX	Alexander Industries Inc.	IMI	Israel Military Industry Ltd.	REM	Remington Arms Company LLC
BADMAN	Badman Bullets	LAPUA	Nammo Lapua Oy	SF	SinterFire Inc.
BARNES	Barnes Bullets, LLC.	LC	Laser Cast, Oregon Trail Bullet Company	SIERRA	Sierra Bullets
BME	Belt Mountain Enterprises	LHG	Lehigh Defense, LLC	SPEER	Speer Bullets
BERGER	Berger Bullets	LYMAN	Lyman Products Corp.	STAR	Starline Brass Inc.
BERRY	Berry's Manufacturing Inc.	MCB	Montana Cast Bullets	SWIFT	Swift Bullet Company
BIB	Bibullets	MIL	Military	TS	True Shot, Oregon Trail Bullet Company
CP	Cast Performance Bullet Company	MSS	Mid-South Shooter's Supply	WBY	Weatherby Inc.
FED	Federal Cartridge Company	MTB	Mount Baldy Bullet Company	WIN	Winchester
FNH	Fabrique Nationale, Herstal	NORMA	Norma Precision AB	WDL	Woodleigh Bullets
GSCB	GS Custom Bullets	NOSLER	Nosler Inc.		
HAWK	Hawk Inc.	PENN	Penn Bullets		

PRIMER ABBREVIATIONS

SP	Small Pistol	SR	Small Rifle
SPM	Small Pistol Magnum	SRM	Small Rifle Magnum
LP	Large Pistol	LR	Large Rifle
LPM	Large Pistol Magnum	LRM	Large Rifle Magnum

OTHER ABBREVIATIONS

CIP	Commission Internationale Permanente
CUP	Copper Units of Pressure
SAAMI	Sporting Arms and Ammunition Manufacturers' Institute
C	Compressed Powder Charge

BULLET ABBREVIATIONS

A-BOND	Accubond	HP/FN	Hollow Point Flat Nose	SPT-V	Spitzer Varmint
A-Bond LR	Accubond Long Range	HP-V	Hollow Point Varminter	SPZSP	Spitzer Soft Point (Speer)
A-MAX	A-Max Match Bullet (Hornady)	HP "Bee"	Hollow Point for Tube Fed Rifles	SSP	Single Shot Pistol
AF	A Frame	HPBT	Hollow Point Boat Tail	SSSP	Semi-Spitzer Soft Point
B-L	Blood Line	HPBT-CC	Hollow Point Boat Tail Custom Competition	SST	Super Shock Tipped
B-TIP	Ballistic Tip (Nosler)	HPFB	Hollow Point Flat Base	SWC	Semi Wadcutter
BAND-S	Banded Solid	JHC	Jacketed Hollow Cavity	SWCBB	Semi Wadcutter Beveled Base
BB	Bevel Base	JHP	Jacketed Hollow Point	TAC-TX	Tactical Tipped X-Bullet M/LE
BK	BlitzKing	JSP	Jacketed Soft Point	TAC-X BT	Tactical X Bullet Boat Tail
B-PIN	Bowling Pin	KSPB	Keith-Style Piston Bullet	TAC-XP	Tactical X-Bullet M/LE
BST	Ballistic Silver Tip, Combined Technology	(L)	Lead	TC	Truncated Cone
BSTR	Buster (Barnes)	LFNGC	Long Flat Nose Gas Check	TCBB	Truncated Cone Beveled Base
BT-FMJ	Boat Tail - Full Metal Jacket with Cannelure	LFNPB	Long Flat Nose Plain Base	T-HEAD	Thunder Head
BT-MB	Boat Tail - Match Burner	LRX	Long Range X Bullet	THOTM	Tactical Hybrid Open Tip Match
BTHP	Boat Tail Hollow Point	LRX BT	Long Range X Bullet BT	TMJ-FN	Total Metal Jacket - Flat Nose
BTHP-M	Boat Tail Hollow Point - Match	M 855	US Military Enhanced Penetrator	TNT-HP	Varmint Hollow Point (Speer)
BTLF	Ballistic Tip Lead-Free	M-HYB	Match Hybrid	TRN	Total Copper Jacket Round Nose
BTSP	Boat Tail Spire Point	M-TSP	Mag-Tip Soft Point	TSX	Triple Shock X-Bullet
BTT	Boat Tail Target	MIL	Typical Military Ball	TSX-BT	Triple Shock Boat Tail
BTTLR	Boat Tail Target Long Range	MK	Match King	TSX-FB	Triple Shock Flat Base
BTV	Boat Tail Varmint	MMF	Match Mag Feed	TTSX	Tipped Triple Shock X-Bullet
CT	Combined Technologies, Olin/Nosler	MPG	Multi-Purpose Green	V-MAX	V-Max Varmint Bullet (Hornady)
CTRN	Combined Technologies Round Nose	MRX	Maximum Range X Bullet	VAR	Varmint Bullet (Berger)
DBB	Double Beveled Base	NTP	Narrow Taper Point	VARM	Varminator
E-TIP	Polymer Tip, Lead-Free	NTX	Non-Toxic Expanding	VARMG	Varmageddon
FB	Flat Base	(P)	Plated Bullet	VARMGT	Varmageddon Tipped
FB-MB	Flat Base-Match Burner	PART	Partition	VG	Varmint Grenade
FBT	Flat Base Target	PH	Pro-Hunter	VLC	Varmint bullet with Dry Lubricant Coating
FBV	Flat Base Varmint	PLINKR	Plinker Lead-Tipped Short-Jacket	VLD	Very Low Drag
FMJ	Full Metal Jacket	PSP CL	Pointed Soft Point Core Loct	VNX	Varmint Nightmare X-treme
FMJ-BT	Full Metal Jacket Boat Tail	PUNCH	Punch Bullet, BME	WBFPGC	Wide Base Flat Point Gas Check
FMJ-CT	Full Metal Jacket - Combat/Target	RHFP	Reduced Hazard Flat Point	WC	Wadcutter
FN	Flat Nose	RN	Round Nose	WCDBB	Wadcutter Double Base Beveled
FN-O	Flat Nose Original (Barnes)	RNDS	Round Nose Double Strike	WCSSG	Wadcutter Single Grease Groove
FNSP	Flat Nose Soft Point	RNFP	Round Nose Flat Point	WFNGC	Wide Flat Nose Gas Check
FP	Flat Point	RNFPGC	Round Nose Flat Point Gas Check	WFNPB	Wide Flat Nose Plain Base
FPJ	Full Profile Jacket	RNSWC	Round Nose Semi Wadcutter	WFPGC	Wide Flat Point Gas Check
FS	Fail Safe, Combined Technology	RS	Radiused Shoulder	WLCPP	Weldcore Protected Point
FTX	Flexible Tip Technology	SBT	Spitzer Boat Tail (Sierra)	WLNGC	Wide Long Nose Gas Check
GC	Gas Check	SBTSP	Spitzer Boat Tail Spire Point (Speer)	WNFPGC	Wide Nose Flat Point Gas Check
GDHP	Gold Dot Hollow Point	S-SPTZ	Semi-Spitzer	WNGC	Wide Nose Gas Check
GK	GameKing	SCENAR	Match Boat Tail (Lapua)	WTP	Wide Taper Point
GMX	Gilding Metal Expanding	SCIR	Scirocco	X	X Bullet
GS	Golden Saber	SLD	Solid	XBT	X Boat Tail Bullet
GSLAM	Grand Slam	SMP	Semi Point	XFB	X Flat Base Bullet
HB	Hollow Base	SP	Spire Point or Soft Point	XPB	X Pistol Bullet
HORNET	Bullet intended for .22 Hornet velocities	SPHJ	Soft Point Heavy Jacket	XTP	Extreme Terminal Performance
HP	Hollow Point	SPSX	Spire Point Super Explosive		
HPFB	Hollow Point Flat Base	SPT	Spitzer (Sierra)		

UNDERSTANDING THE DATA ■

1. **BULLET WEIGHT** - this column indicates the actual weight of the bullet used (measured in grains)
2. **BULLET MAKE** - this column shows the manufacturer of the bullet used (see page 19 for abbreviation list)
3. **BULLET TYPE** - this column indicates the brand name and/or specific type of bullet used (see page 19 for abbreviation list)
4. **START LOAD** - this column defines the weight of powder you should always use to start your load testing with the specific powder listed (measured in grains)
5. **START VELOCITY** - this column indicates the actual bullet velocity measured by our ballistics lab (measured in feet per second) when using the start load of powder
6. **MAX LOAD** - this column defines the maximum weight of powder you could use in your load testing with the specific powder listed (measured in grains). NEVER EXCEED THIS MAXIMUM LOAD as it can create a very dangerous load combination.
7. **MAX VELOCITY** - this column indicates the actual bullet velocity measured by our ballistics lab (measured in feet per second) when using the maximum load of powder
8. **MAX PRESSURE** - this column indicates the pressure of the maximum load tested (measured in pounds per square inch).
9. **COL (CARTRIDGE OVERALL LENGTH)** - this column provides the length of the loaded cartridge used in our tests. It is measured from bullet tip to the bottom of the case (in inches). See *Special Note on COL below*.
10. **COMP. LOAD** - this column indicates a compressed powder charge. (*Rifle section only*)



1	2	3	4	5	6	7	8	9	10
Bullet Weight (Grains)	Bullet Make	Bullet Type	Start Load (Grains)	Start Velocity (FPS)	Max Load (Grains)	Max Velocity (FPS)	Max Pressure (PSI)	COL (Inches)	Comp. Load

17 HORNET

Barrel: 24" | Twist: 1-10" | Primer: WIN WSR | Bullet Diameter: 0.172"

Case: HORN | Max Case Length: 1.340" | Trim Length: 1.330"

ACCURATE 5744

20	HDY	V-MAX	10.1	3,097	11.2	3,412	47,498	1.711	C
20	NOSLER	VARMG	10.1	3,106	11.2	3,424	49,018	1.720	
25	BRG	VARMNT	9.5	2,828	10.5	3,125	49,674	1.720	
25	HDY	V-MAX	9.4	2,786	10.5	3,070	49,298	1.711	

ACCURATE 1680

20	HDY	V-MAX	10.0	3,183	11.2	3,493	49,657	1.711	
20	NOSLER	VARMG	10.1	3,203	11.2	3,483	49,354	1.720	
25	BRG	VARMNT	9.0	2,862	9.8	3,041	49,156	1.720	
25	HDY	V-MAX	9.0	2,724	10.0	2,983	49,046	1.711	

ACCURATE LT-30

20	HDY	V-MAX	10.8	3,093	12.0	3,404	47,324	1.711	
C									
20	NOSLER	VARMG	10.9	3,139	12.1	3,423	47,685	1.720	C
25	BERGER	VARM	9.9	2,771	11.0	3,071	49,768	1.720	C
25	HDY	V-MAX	10.3	2,801	11.4	3,093	49,868	1.711	C

ACCURATE LT-32

25	BERGER	VARM	10.4	2,789	11.6	3,083	49,768	1.720	C
----	--------	------	------	-------	------	-------	--------	-------	---

ACCURATE 2200

20	HDY	V-MAX	11.7	3,203	13.0	3,553	49,669	1.711	C
20	NOSLER	VARMG	11.9	3,297	13.2	3,606	49,934	1.720	C
25	BRG	VARMNT	10.8	2,946	12.1	3,235	49,267	1.720	
25	HDY	V-MAX	11.2	2,930	12.4	3,223	48,714	1.711	C

GENERAL GUIDELINES:

- Always begin loading at the minimum "Start Load"
- Increase in 2% increments towards the Maximum Load
- Watch for signs of excessive pressure
- Never exceed the Maximum Load

NOTES ON CARTRIDGE OVERALL LENGTH ■

- Cartridge Overall Length (COL) is an important measurement that sets both bullet protrusion into the chamber and usable space within a cartridge.
- In pistol cartridges, the tested COL should be followed closely. Seating bullets more deeply into the case will increase pressure.
- Overall length in rifle cartridges may be moved more freely to fit individual chambers.

Western Powders would like to thank the following companies for their continued support in our efforts to provide this reloading information:

- Barnes Bullets, Inc.
- Berger Bullets
- Berry's Manufacturing
- Cast Performance Bullet Company
- Crimson Trace
- Federal Cartridge
- Hornady
- Montana Cast Bullets
- Montana Gold
- Nosler
- Oregon Trail Bullet Company
- Rainier Bullets
- Redding Reloading Equipment
- Remington
- Sierra Bullets
- Swift Bullets
- Winchester
- Woodleigh Bullets



HANDGUN DATA

Bullet Weight (Grains)	Bullet Make	Bullet Type	Start Load (Grains)	Start Velocity (FPS)	Max Load (Grains)	Max Velocity (FPS)	Max Pressure (PSI)	COL (Inches)
------------------------	-------------	-------------	---------------------	----------------------	-------------------	--------------------	--------------------	--------------

22 TCM

Barrel: 5" | Twist: 1-12" | Primer: CCI 500 | Bullet Diameter: 0.224"
Case: Armscor | Max Case Length: (Consult with Firearm Manufacturer)

ACCURATE NO. 11FS

35	HDY	V-MAX	10.0	1,791	11.1	2,054	38,219	1.290
39	Armscor	HP	9.6	1,682	10.7	1,914	37,917	1.150
40	SIERRA	SP	10.0	1,762	11.2	1,945	38,473	1.285

357 MAGNUM

Barrel: 6" | Twist: 1-18.75" | Primer: WIN WSPM | Bullet Diameter: 0.357"
Case: WIN | Max Case Length: 1.290" | Trim Length: 1.280"

ACCURATE NO. 11FS

158	SPEER	JHP	14.2	1,183	16.7	1,407	34,382	1.580
170	SIERRA	FMJ	13.7	1,134	16.1	1,364	33,869	1.580
200 (L)	CP	WLNGC	12.0	1,092	14.1	1,272	34,528	1.610

41 REMINGTON MAGNUM

Barrel: 10" | Twist: 1-18.75" | Primer: FED 155 | Bullet Diameter: 0.410"
Case: REM | Max Case Length: 1.290" | Trim Length: 1.280"

ACCURATE NO. 11FS

210	NOSLER	JHP	18.8	1,398	22.1	1,659	34,169	1.590
215 (L)	LC	SWC	18.2	1,411	21.4	1,643	30,284	1.600
250 (L)	CP	WFNPB	17.6	1,330	20.7	1,539	34,923	1.674
255 (L)	CP	WFNGC	17.7	1,321	20.8	1,535	34,967	1.662
265 (L)	TS	WNFPGC	16.6	1,275	19.5	1,473	34,864	1.720

44 REMINGTON MAGNUM

Barrel: 8.275" | Twist: 1-20" | Primer: CCI 350 | Bullet Diameter: 0.429"
Case: REM | Max Case Length: 1.285" | Trim Length: 1.275"

ACCURATE NO. 11FS

180	HDY	XTP	25.4	1,632	29.9	1,909	34,869	1.600
200	BARNES	XPB	18.6	1,351	21.8	1,593	35,286	1.600
200	NOSLER	HP	23.2	1,479	27.3	1,777	34,967	1.595
220	LHG	XP	19.3	1,255	22.7	1,502	34,794	1.600
225	BARNES	XPB	16.4	1,207	19.2	1,411	34,997	1.600
240	SIERRA	JHC	19.2	1,321	22.6	1,554	35,728	1.590
265	HDY	FP	18.7	1,263	21.9	1,475	34,659	1.625
275 (L)	CP	WFNPB	19.4	1,284	22.8	1,502	35,329	1.650
300 (L)	LC	TC	15.4	1,125	18.1	1,306	35,419	1.605
320 (L)	CP	WLNGC	17.1	1,170	20.2	1,349	35,948	1.695

45 COLT 30,000 PSI - HIGH PRESSURE LOADS

Barrel: 7.26" | Twist: 1-16" | Primer: REM 2 1/2" | Bullet Diameter: 0.452"
Case: REM | Max Case Length: 1.285" | Trim Length: 1.275"

ACCURATE NO. 11FS

255 (L)	LC	SWC	24.2	1,287	28.4	1,549	29,041	1.604
300 (L)	LC	FP	19.4	1,146	22.8	1,353	29,387	1.566
325 (L)	MBW	SWCGCDC	17.1	1,031	20.2	1,223	28,984	1.570
335 (L)	CP	WLNGC	19.7	1,124	23.2	1,317	29,976	1.665
360 (L)	CP	WLNGC	17.9	1,059	21.1	1,231	29,751	1.670
395 (L)	CP	WLNGC	15.5	954	18.2	1,120	29,897	1.670

Bullet Weight (Grains)	Bullet Make	Bullet Type	Start Load (Grains)	Start Velocity (FPS)	Max Load (Grains)	Max Velocity (FPS)	Max Pressure (PSI)	COL (Inches)
------------------------	-------------	-------------	---------------------	----------------------	-------------------	--------------------	--------------------	--------------

454 CASULL

Barrel: 7.5" | Twist: 1-24" | Primer: CCI 400 | Bullet Diameter: 0.452"
Case: HORN | Max Case Length: 1.383" | Trim Length: 1.373"

ACCURATE NO. 11FS

360 (L)	CP	WLNGC	22.5	1,299	26.4	1,525	50,246	1.770
395 (L)	CP	WLNGC	19.4	1,180	22.9	1,364	48,962	1.770

460 S&W

Barrel: 8.37" | Twist: 1-20" | Primer: WIN WLR | Bullet Diameter: 0.452"
Case: HORN | Max Case Length: 1.800" | Trim Length: 1.750"

ACCURATE NO. 11FS

315 (L)	MBW	SWCKGC	35.0	1,641	41.2	1,907	58,991	2.210
325 (L)	MBW	SWCGCDC	31.7	1,580	36.5	1,802	58,908	2.095
335 (L)	CP	WLNGC	33.3	1,572	39.2	1,863	59,957	2.180
360 (L)	CP	WLNGC	31.5	1,533	37.1	1,775	59,851	2.190
395 (L)	CP	WLNGC	29.1	1,458	33.4	1,639	59,637	2.190

475 LINEBAUGH

Barrel: 8.0" | Twist: 1-18" | Primer: WLP | Bullet Diameter: 0.475"
Case: STAR | Max Case Length: 1.400" | Trim Length: 1.390"

ACCURATE NO. 11FS

355 (L)	TS	WNFPGC	26.7	1,323	31.4	1,581	42,066	1.770
375 (L)	CP	LFNGC	24.7	1,309	29.1	1,537	48,718	1.750
410 (L)	CP	WFNGC	22.7	1,208	26.7	1,406	42,946	1.760
425 (L)	CP	LFNGC	19.7	1,120	23.1	1,295	42,519	1.730

480 RUGER

Barrel: 7.5" | Twist: 1-18" | Primer: WIN WLP | Bullet Diameter: 0.475"
Case: STAR | Max Case Length: 1.285" | Trim Length: 1.275"

ACCURATE NO. 11FS

355 (L)	TS	WNFPGC	23.1	1,257	27.2	1,472	40,964	1.645
375 (L)	CP	LFNGC	20.7	1,196	24.3	1,375	41,839	1.625
410 (L)	CP	WFNGC	18.8	1,136	22.1	1,276	41,398	1.635
425 (L)	CP	LFNGC	15.4	967	18.1	1,137	39,127	1.605

500 S&W

Barrel: 8.37" | Twist: 1-18" | Primer: WLR | Bullet Diameter: 0.500"
Case: HORN | Max Case Length: 1.620" | Trim Length: 1.615"

ACCURATE NO. 11FS

300	HDY	FTX	43.1	1,849	49.6	2,095	55,114	2.175
350	SIERRA	JHP	40.3	1,661	46.3	1,882	55,036	2.050
370 (L)	TS	WNFPGC	40.5	1,676	46.6	1,919	55,989	2.000
375	BARNES	XPB	36.0	1,544	39.9	1,695	56,683	2.292
410 (L)	MBW	LFNGC	37.1	1,521	43.7	1,759	55,442	2.085
440 (L)	MBW	LFNGC	36.7	1,474	42.2	1,682	55,792	2.105
450 (L)	MBW	LFNGC	33.7	1,461	38.7	1,661	55,953	1.995
500	HDY	XTP	29.6	1,307	32.9	1,441	56,586	2.070

Continued on next page

RIFLE DATA

Bullet Weight (Grains)	Bullet Make	Bullet Type	Start Load (Grains)	Start Velocity (FPS)	Max Load (Grains)	Max Velocity (FPS)	Max Pressure (PSI)	COL (Inches)
------------------------	-------------	-------------	---------------------	----------------------	-------------------	--------------------	--------------------	--------------

300 AAC BLACKOUT

Barrel: 16" | Twist: 1-10" | Primer: WIN WSR | Bullet Diameter: 0.308"
 Case: REM | Max Case Length: 1.368" | Trim Length: 1.358"

ACCURATE NO. 11FS

110	BARNES	TAC-TX	17.2	1,989	19.8	2,274	47,296	2.250
110	HDY	V-MAX	18.3	2,095	21.0	2,381	51,376	2.068
125	SIERRA	TMK	17.2	1,960	19.7	2,188	53,261	2.220
130	BARNES	TTSX	14.4	1,687	16.5	1,936	43,318	2.065
150	SIERRA	HPBT MK	15.2	1,723	17.4	1,941	53,987	2.150
155	SIERRA	TMK	14.3	1,678	16.4	1,888	54,884	2.190

300 AAC BLACKOUT (SUBSONIC LOADS)

Barrel: 16" | Twist: 1-10" | Primer: WIN WSR | Bullet Diameter: 0.308"
 Case: REM | Max Case Length: 1.368" | Trim Length: 1.358"

ACCURATE NO. 11FS

210	SIERRA	HPBT MK	9.4	1,074			31,654	2.170
220	SIERRA	HPBT MK	9.4	1,099			38,754	2.089
230	BERGER	THOTM	9.7	1,084			40,767	2.245