




HODGDON
THE GUNPOWDER PEOPLE®

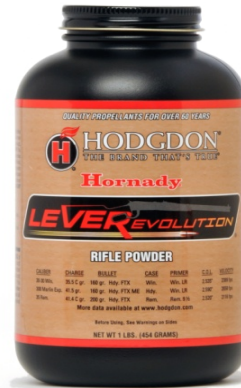

SUPERFORMANCE

Bullet: Wt.	Diam.	C.O.L.	Grs.	Vel.(ft/s)	Pressure
22-250 REMINGTON					CASE: WINCHESTER
BBL: 24"					PR: WINCHESTER LR
60 GR. HDY V-MAX	.224"	2.350"	43.0C	3738	60,000 PSI
63 GR. SIE SP	.224"	2.350"	42.7C	3674	61,400 PSI
70 GR. SPR SP	.224"	2.330"	40.8C	3499	63,700 PSI
243 WINCHESTER					CASE: WINCHESTER
BBL: 24"					PR: WINCHESTER LR
70 GR. SPR HP	.243"	2.625"	51.0C	3661	57,900 PSI
75 GR. HDY HP	.243"	2.640"	49.0	3510	57,900 PSI
243 WINCHESTER SUPER SHORT MAGNUM					CASE: WINCHESTER
BBL: 24"					PR: WINCHESTER LR
70 GR. NOS BT	.243"	2.230"	54.0C	3821	61,000 PSI
80 GR. SIE BTSP	.243"	2.220"	52.0C	3648	64,200 PSI
90 GR. SFT SCIR	.243"	2.300"	47.6C	3362	63,800 PSI
6mm REMINGTON					CASE: WINCHESTER
BBL: 24"					PR: REMINGTON 9 1/2
70 GR. SIE HPBT	.243"	2.810"	54.0	3812	61,000 PSI
75 GR. HDY HP	.243"	2.825"	52.0	3637	60,700 PSI
80 GR. BAR TTSX BT	.243"	2.810"	51.0C	3581	59,600 PSI
80 GR. SPR SP	.243"	2.775"	51.4	3536	61,000 PSI
25 WINCHESTER SUPER SHORT MAGNUM					CASE: WINCHESTER
BLL: 24"					PR: WINCHESTER LR
100 GR. SPR BT	.257"	2.300"	52.0C	3381	59,700 PSI
115 GR. NOS BT	.257"	2.350"	48.5C	3081	60,300 PSI
117 GR. HDY BTSP	.257"	2.335"	49.0C	3097	60,300 PSI
120 GR. SFT SP	.257"	2.330"	48.7C	3062	61,800 PSI
300 WINCHESTER SHORT MAGNUM					CASE: WINCHESTER
BBL: 24"					PR: WINCHESTER LRM
130 GR. HDY SP	.308"	2.720"	77.0C	3645	62,600 PSI
150 GR. SPR GSSP	.308"	2.780"	74.0	3410	63,500 PSI
155 GR. HDY A-MAX	.308"	2.860"	73.5C	3405	63,500 PSI
165 GR. NOS PART	.308"	2.860"	72.0	3273	63,500 PSI
300 RUGER COMPACT MAGNUM					CASE: HORNADY
BBL: 24"					PR: WINCHESTER LRM
150 GR. HDY IB	.308"	2.830"	67.0C	3254	59,000 PSI
155 GR. NOS HPBT	.308"	2.830"	67.5C	3250	60,800 PSI
165 GR. BAR TSX	.308"	2.800"	65.0C	3126	60,600 PSI
168 GR. SIE HPBT	.308"	2.820"	65.5C	3125	63,300 PSI

LEVEREVOLUTION

Bullet: Wt.	Diam.	C.O.L.	Grs.	Vel.(ft/s)	Pressure
25-35 WINCHESTER					CASE: WINCHESTER
BBL: 24"					PR: WINCHESTER LR
75 GR. SPR JFP	.257"	2.280"	34.0C	2992	33,100 CUP
30-30 WINCHESTER					CASE: WINCHESTER
BBL: 24"					PR: WINCHESTER LR
150 GR. SIE FN	.308"	2.550"	38.5C	2512	34,800 CUP
160 GR. HDY FTX	.308"	2.535"	35.5C	2389	37,500 CUP
170 GR. SIE FP	.308"	2.550"	36.3C	2332	35,400 CUP
308 MARLIN EXPRESS					CASE: HORNADY
BBL: 24"					PR: WINCHESTER LR
150 GR. BAR TSX FN	.308"	2.350"	42.0	2632	44,400 PSI
160 GR. HDY FTX ME	.308"	2.590"	41.5	2658	47,000 PSI
170 GR. HDY FP	.308"	2.400"	41.4	2565	46,800 PSI
338 MARLIN EXPRESS					CASE: HORNADY
BBL: 24"					PR: WINCHESTER LRM
200 GR. HDY FTX	.338"	2.590"	47.5	2493	46,000 PSI
338 FEDERAL					CASE: FEDERAL
BBL: 24"					PR: FEDERAL 210
210 GR. SFT SCIR	.338"	2.820"	49.0C	2622	56,400 PSI
215 GR. SIE SP	.338"	2.810"	52.0C	2668	57,900 PSI
225 GR. SFT SP	.338"	2.750"	48.0C	2518	61,800 PSI
35 REMINGTON					CASE: REMINGTON
BBL: 24"					PR: REMINGTON 9 1/2
180 GR. SPR FN	.358"	2.470"	45.0C	2302	33,900 CUP
200 GR. HDY FTX	.358"	2.520"	41.4C	2116	34,700 CUP
200 GR. HDY RN	.358"	2.510"	45.0C	2235	31,200 CUP

Loads listed are Maximum loads, reduce by 10% to start.

DO NOT EXCEED LISTED LOADS

Questions?

Contact the Hodgdon Technical Department at:
913-362-9455